


Ricoh Aficio MP 301SPF

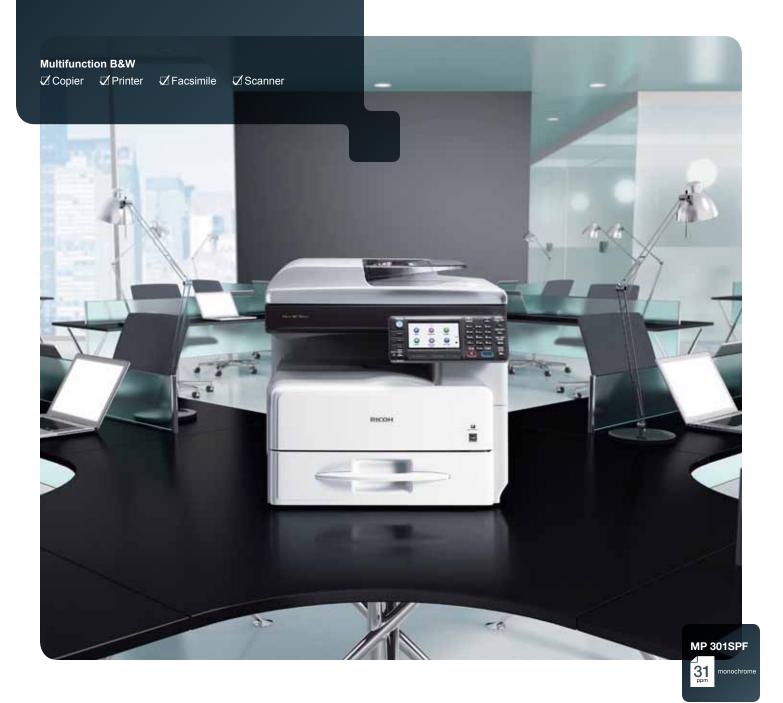

Affordable, productive multitasking at your convenience

Raise your expectations — and improve your productivity. The RICOH® Aficio® MP 301SPF offers advanced capabilities to streamline workflow and reduce total cost of ownership. Use it to produce fast, black-and-white output, share electronic documents, protect sensitive information and optimize IT resources cost-effectively. With its unique combination of powerful, reliable performance and intuitive management in a compact design, it offers incredible value as the primary multifunction device in an office or as part of an integrated Ricoh Managed Document Services (MDS) strategy throughout the enterprise. Expect the MP 301SPF to exceed your low-volume, desktop multifunctional product demands without compromising space or the budget.

Choose your own efficiency

Loaded with customizable features in a sleek, desktop design, the MP 301SPF makes everyday tasks more accessible. The tiltable, 4.3" color touch-panel display and an optional external keyboard enable users to deftly manage every job with ease. Four frequently used functions are available directly from the Home Screen, so users can select specific workflows quickly to save steps and help maximize productivity. In addition, users can return to the Home Screen at any time with simple, one-touch operation.

Perform any task, anywhere

Move mobile users forward, while improving workflow, with innovative electronic media capabilities. Users can insert a USB memory or SD card into a slot on the MFP control panel to preview and print output remotely, without a PC. Users can also work from a mobile device, such as a smart phone or tablet, to locate the MFP quickly and print output without the use of utilities, software or drivers.

Discover the power of versatility

The MP 301SPF enables users to handle a wide range of demanding tasks with ease. It generates up to 31 pages per minute for outstanding throughput. Storage capacity can be expanded to 1,350 paper sheets to support longer, uninterrupted runs. Its 8" x 14" platen is perfect for copying, scanning and faxing oversized documents, including booklets, catalogs and other media. In addition, when the optional hard drive is installed the Document Server offers convenient access for up to 3,000 frequently-used documents.









A sleek, compact MFP streamlined for the desktop—and your workflow

Sustainable savings and productivity

Backed by Ricoh's long-standing commitment to energy- and environmentally-friendly solutions, the MP 301SPF offers a host of innovative features to reduce total cost of ownership. With the Eco-Friendly Indicator, users can check usage status for individual employees and foster more environmental awareness and responsible paper consumption. With its class leading energy efficiency, based on the low Typical Energy Consumption (TEC) value of only 1.5 kWh/week, combined with a short recovery time of less than 10 seconds from Sleep Mode, high speed duplexing and enhanced first copy out time, the system provides a quicker availability and saves more energy.



Sophisticated scanning and faxing

Capture black-and-white or full-color originals quickly and distribute them electronically for faster, more affordable communications. Users can retrieve numbers and addresses from LDAP-registered directories and eliminate costly delivery charges by sending documents instantly via Scan-to-Email/Folder/SD/USB. One-sided and two-sided originals can be scanned in a single job using Enhanced Batch Scan to boost productivity. Plus, a powerful Super G3 fax modem, IP (T.38) and Internet (T.37) faxing minimize bottlenecks while eliminating transmission costs.



Complex management tasks simplified

With exceptional compatibility and easy-to-use utilities, the MFP automates processes and optimizes workflow. Users can take advantage of Ricoh's services-led platform to integrate customized applications and software solutions to boost productivity and help reduce operating costs. Shortcuts, system and application settings and more can be exported to an SD card for installation on another MP 301. Workflows can be customized from the desktop and accessed within moments for fast walk-up operations on the most comprehensive jobs.

lcons can be edited and an image ca	n be inserted on the Home scree
►Edit Icons	
Move Icon	Delete Icon
Add Icon	Restore Default Icon Display
▶ Insert Image	
Insert Image on Home Screen	

Ricoh Aficio MP 301SPF

SYSTEM SPECIFICATIONS

General Specifications Printer		
Configuration	Desktop Multifunctional Product (MFP)	CPU
Scanning Element	Flatbed with CCD array image-sensing element	Memory Capa Hard Disk Dri
Printing Process	Laser beam scanning/marking & electro-	Page Descrip
A	photographic printing	Languages
System Memory	1GB. (RAM) standard	Maximum Prir
Output Speed	Up to 31 ppm (Letter)	Standard Inte
(Copy/Print) First Copy Time	6 seconds or less	Ontional Inter
	Less than 23 seconds (from main power	Optional Inter
Recovery Time to Product Ready Mode	switch on)	Network Prot
FIGURE Ready Mode	Less than 10 seconds (from sleep mode)	INELWORK FIOL
Copy Resolution	600 x 600 dpi (platen), 600 x 300 (ARDF)	Fonts for PCL
Grayscale	256 levels	Fonts for PS3
Exposure Adjustment	Manual and automatic	Network Ope
Multiple Copies	Up to 99	Systems
Document Feeder	Automatic Reversing Document Feeder	Gystems
(Standard)	(ARDF)	
Original Capacity	50 sheets (ARDF)	
Paper Sizes	Standard Tray: 5.5" x 8.5" to 8.5" x 11"	
	(A4/ LT/A5/HLT)	
	Optional Trays: 8.5" x 11" to 8.5" x 14"	
	(A4/LT/ LG/Folio)	
	Bypass Tray: 5.5" x 8.5" to 8.5" x 14"	
	(A6/A5/A4/LT/LG)	Utilities
	Duplex Unit: 8.5" x 11" to 8.5" x 14"	
	(A4/LT/LG)	Other Printer
Paper Weights	Standard/Optional Trays: 16 – 24 lb. Bond	
	(60 – 90 g/m²)	
	Bypass Tray: 16 – 42 lb. Bond (60 – 157 g/m ²)	
	Duplex Unit: 20 – 24 lb. Bond (60 – 90 g/m²)	
Exposure Glass	Up to 8.5" x 14"	
Input Capacity	Standard: 250 sheets + 100-Sheet	
	Bypass Tray	
	Optional: 500 sheets x 1 or 2 Trays	
Output Capacity Paper Types	250 sheets (internal tray) Plain, Recycled, Colored, Letterhead,	'HDD option red
Paper Types	Preprinted, Bond, Card Stock, Prepunched,	•
	Special, Thick*, OHP (Transparency)*	Scanner
	Envelopes*, Label Stock*	Scanning Spe
Auto Duplex	Standard	
Zoom	25% to 400% in 1% increments	Scanning Res
Preset Reduction and	65%, 78%, 93%, 129%, 155%	Scan Area
Enlargement Ratios		
Dimensions (WxDxH)	19.0" x 17.7" x 18.1" (476 mm x 450 mm	Compression
	x 451 mm) – includes ARDF	
Weight	57.3 lbs./ 26 kg.	Scan Mode
Power Requirements	120V, 60Hz, 8A	
Power Consumption	Less than 1,1 kW (max.)	
	Sleep Mode, 2.8 W (MP 301SPF)	Standard Inte
TEC	MP 301SPF - 1.507 kWh/week***	Optional Inter
Standard Features	Document Server**, Image Rotation, Auto	

*Bypass Tray only **HDD option required.

***Typical electric consumption by ENERGY STAR program

er

RM7035C - 533 MHz Standard: 1 GB RAM y Capacity isk Drive Optional: 128 GB HDD Standard: PCL5e/6, Genuine Adobe® Description PostScript®3 um Print Resolution 600 x 600 dpi Ethernet (RJ-45 network port : 10Base-T/ rd Interfaces 100Base-TX), USB2.0 Type A and B al Interfaces IEEE1284, Wireless LAN (IEEE802.11a/b/g), Giga Ethernet (1000BASE-T), Bluetooth rk Protocols TCP/IP (IPv4, IPv6), IPX/SPX (available with Netware option) or PCL 5e/6 45 Roman fonts or PS3 136 Roman fonts Windows XP/Server 2003/Vista/Server 2008/7; Novell Netware 6.5; UNIX Filters rk Operating for Sun Solaris 2.6/7/8/9/10; HP-UX 10.x/11.x/11iv2/11iv3; Red Hat Linux Enterprise V4, V5, V6; SCO OpenServer 5.0.6/5.0.7/6.0; IBM AIX Version 5.3, 6.1, 7.1; SAP R/3, 3.x or later, mySAP, ERP2004 or later; Mac OSX 10.2 or later, Citrix Metaframe XP/ Presentation Server 4, 5/XenApp 5.0, 6.0 SmartDeviceMonitor for Admin and Client, Web SmartDeviceMonitor, Web Image Monitor Printer Features Media Direct Print (Print from USB/SD)'. Mobile Driver, Bonjour Support, Classification Code, Mail to Print', PDF Direct Print, Sample/Hold/Stored/Locked Print', Store and Print', Windows Active Directory Support, DDNS Support, WSPrinter, PCL resident font adoption. Tray-Parameter Change from WebImageMonitor, XPS Support otion required 31 ipm @ 300 dpi B/W (LT) 21 ipm @ 300 dpi Full-Color (LT) ng Speed 100 to 600 dpi Main: 8.5" (216 mm) Sub: 14.02" (356 mm) ng Resolution ession Method B/W: MH (default), MR, MMR, JBIG2 Full-Color: JPEG B/W: Text, Text/Line Art, Text/Photo, Photo, Grayscale Full-Color: Text/Photo, Glossy Photo, Grayscale Ethernet 10BASE-T/100BASE-TX rd Interfaces Wireless LAN (IEEE 802.11a/b/g), Gigabit al Interfaces Ethernet (1000BASE-T) File Formats: Single/Multi Page TIFF, Single/Multi Page PDF, Single/Multi Page

High Compression PDF and Single/Multi Page PDF/A; Single Page JPEG Scan-to-USB/SD, Scan-to-Email (POP, Scan Modes Supported SMTP, TCP/IP)'; Scan-to-Folder (SMB/ FTP/NCP)2: Network TWAIN Scanning;

Standard Features

HDD option required. Netware option required

Fax

Type Circuit Resolution Modem Speed Compression Method Scan Speed Transmission Speed Memory Memory Backup Quick/Speed Dials Group Dials

User Function Key Standard Features

PDF Encryption, Preview Before Transmission (TX Preview)', Drop Out Color Send, Simultaneous Fax and Scan, Scan-to-Email/SMB/FTP/URL1/NCP2, LDAP Support, TWAIN Scanning

ITU-T (CCITT) G3 PSTN, PBX
200 x 100 dpi, 200 x 200 dpi
33.6K – 2,400 bps with Auto Fallback
MH, MR, MMR, JBIG
2.4 seconds (Letter)
Approx. 2 seconds/page (JBIG)
4 MB (approx. 320 pages)
12 hours
200 (2,000 with HDD Option)
10 groups (max. 100 numbers per group
with HDD option)
3 keys
Detection of Misplaced Documents,
Double Check Destination Address, Direct
SMTP, Simultaneous Fax and Scan, Fax
Forward to Email/Folder, Internet Fax
(T.37) ¹ , IP Fax (T.38) ¹ , LAN Fax, Paperless
Fax ¹ , LDAP Support

HDD option required.

Paper Feed Unit PB1040 (Option)

Paper Size	8.5" x 11" SEF, 8.5" x 14" SEF (A4/LT/LG)
Paper Weight	16 – 24 lb. Bond (60 – 90 g/m²)
Paper Capacity	500 sheets x 1 or 2 Trays

Additional Options

HDD Option Type 301 (includes HDD overwrite and encryption), Cabinet, Type FAC57, Cabinet, Type FAC58, IEEE1284 Interface Board Type A, IEEE802.11a/g Interface Unit Type J, Gigabit Ethernet Board Type A, Bluetooth Interface Unit Type D, VM Card Type U, File Format Converter Type E, Browser Unit Type G, SD Card for NetWare Printing Type I, Unicode Font Package for SAP (1/10/100 License Packs available), Handset Type C5502, Optional Counter Interface Unit Type A, Copy Data Security Unit Type F, ACK3400-U Key Board

Security

Quota Setting/Account Limit; SMTP over SSL; Hard Disk Data Overwrite Security'; Authentication (Windows/LDAP/Kerberos/Basic/ User Code/802.1.x Wired); Encryption (Address Book/Authentication Password/SSL Communication/S/MIME/IPsec/Locked Print Password/HDD'); Network Protocol (Port) On/Off; IP Filtering; Copy Data Security Unit; RAM Based Security when HDD is not installed Only required with HDD option.

Some features may require additional options.



Off Timer, Combine Copy, Electronic Sort,

Energy Saver Timer, Photo Mode, Series

Copy, Job Programs (25), User Codes

(8 digits, 1,000 Personal Codes)

MP 301SPF and FAC 57 Cabinet



WSDScanner for Vista

MP 301SPF with Optional PB1040 Paper Tray and FAC 58 Cabinet



MP 301SPF with Two Optional PB1040 Paper Trays and FAC 58 Cabinet



RICOH imagine. change.

www.ricoh-usa.com

Ricoh Americas Corporation, Five Dedrick Place, West Caldwell, NJ 07006, 1-800-63-RICOH Ricoh² and the Ricoh Logo are registered trademarks of Ricoh Company, Ltd. All other trademarks are the property of their respective owners. The content of this document, and the appearance, feasures and specifications of Ricoh products and services are subject to change from time without notice. Products are shown with optional features. While card has been taken to ensure the accuracy of this information, Ricoh makes no representation or warranties about the accuracy, completeness or adequacy of the information contained herein, and shall not be liable for any errors or omissions in these materials. Actual results will vary depending upon use of the products and services, and the conditions and factors affecting performance. The only warranties for Ricoh products and services are as set forth in the express warranty statements accompanying them. **25204** R3348